



Fall Protection



# The World's First Retractable Horizontal Lifeline System.

Provides the Ultimate in Safety,  
Ease-of-Use & Productivity!

3M™ DBI-SALA® EZ-Line™  
Retractable Horizontal Lifeline System

[www.3M.com/FallProtection](http://www.3M.com/FallProtection)

- Retractable lifeline is simply pulled out for installation and retracted with built-in handle to tension the line
- Customise your system length in any increment up to 18 m for complete jobsite flexibility
- Entire system stores in an easy to carry case - no more coils of unmanageable cable!
- Installation, removal and storage is the fastest in the industry, taking only seconds, providing ultimate worker productivity
- Built-in tension and impact indicators take the guess-work out of system set-up and service
- Extremely lightweight system is 33% lighter than conventional 18 m systems for increased ease-of-use
- Attaches to any 22 kN rated anchorage connector or stanchion for added versatility
- Provides hands-free horizontal mobility and continuous protection for 2 users per system
- ATEX approved model available

## Increased Productivity

EZ-Line is the most user friendly horizontal lifeline system on the market today! Easy to install, remove and store, EZ-Line's innovative retractable design allows the user to quickly and efficiently set-up any length of system in only seconds and dismantle it just as quick. The entire 18 m EZ-Line system is retracted into an easy to carry case which eliminates large and bulky coils of cable that are difficult to set-up, relocate and store.

Additionally, EZ-Line weighs only 11.25 kg which is 33% lighter than traditional systems providing ease-of-use and added worker satisfaction.

Installation is completed in four simple steps;

- 1) Attach the lifeline with the carabiner to an anchorage connector,
- 2) Depress the locking button allowing cable to pay out and walk to the next anchorage,
- 3) Attach the housing/case with the carabiner to the anchorage connector,
- 4) Tension the lifeline with the built-in crank handle.

## Continuous Protection

After installation the worker(s) is able to attach to the cable lifeline with their fall arrest system and begin work, fully protected. EZ-Line will provide complete horizontal mobility and hands-free fall protection for up to 2 users per system.

EZ-Line incorporates many features increasing jobsite safety. A built-in pre-tension indicator ensures the lifeline is correctly tensioned, minimising dangerous fall clearances.

In addition, the integrated impact indicator provides the user with a visual reference on whether the device has been subjected to a fall. EZ-Line is the safest horizontal lifeline system on the market today!

## Complete Jobsite Flexibility

EZ-Line is fully versatile, you choose the system length in any increment up to 18 m. The remaining cable is simply left on the drum inside the housing/carrying case. In addition, EZ-Line can be anchored to a structure using any 22 kN rated anchorage connector such as fixed beam clamps, tie-off straps and HLL stanchions. EZ-Line provides the ultimate in jobsite versatility.

### 3M Fall Protection Business

**Capital Safety Group (NE) Ltd**  
5a Merse Road, North Moons Moat  
Redditch, B98 9HL, UK

Phone 00 800 999 55500

Email [informationfallprotection@mmm.com](mailto:informationfallprotection@mmm.com)

Web [3M.com/FallProtection](http://3M.com/FallProtection)


3M is a trademark of 3M Company. EZ-Line™ is a trademark of D B Industries, LLC.  
DBI-SALA® is a trademark of Capital Safety Group EMEA.

Registered address: 3M Centre, Cain Road, Bracknell, Berkshire, RG12 8HT. Registered in England and Wales No. 1918922.

### Capital Safety Group (EMEA)

Le Broc Center, Bâtiment A, Z.1.1re Avenue – BP15  
06511 Carros Le Broc, Cedex, FRANCE

## 4-Step Installation Takes Only Seconds!

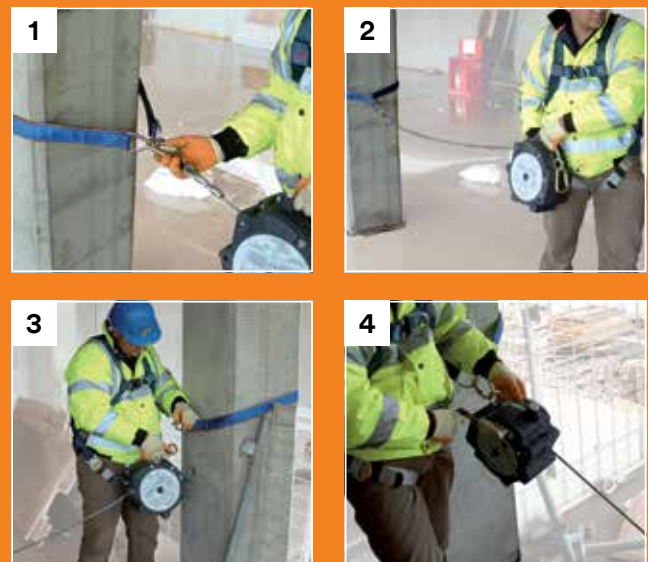

Other equipment shown in this demonstration manufactured by 3M Fall Protection.

7605061		14.96
7605061/A		14.96

EZ-Line Retractable Horizontal Lifeline System, 18 m lifeline, 6.25 mm galvanized cable, tension and impact indicators, and two connecting carabiners.

## Specifications

**Lifeline:** 6.25 mm galvanized 7×19 cable, tensile strength of 24.5 kN. **Housing:** LLDPE Polyethylene. **Carabiners:** Zinc plated steel, 22.2 kN minimum tensile strength. **Anchorage Handle:** Zinc plated. **Capacity:** 2 users per system. Max weight per user weight, including tools & clothes, 141 kg. **Weight:** 11.25 kg. **Size:** 30 cm x 26.25 cm x 18.12 cm. **Standards:** Meets CE (EN795 - C) standards.