

Compact and robust rescue lifting device, can be easily installed on the Tripos tripod (ref.3507).

Positioned on the outside of the leg, it guarantees a large working space inside the tripod.


Mechanism with automatic locking brake and 210 mm handle, for smooth retrieval action.

Swivel connector equipped with fall indicator.

5 mm galvanized steel cable, 15 kN breaking load, 150 kg working load limit.


Available in two versions:

- 3508 20 m
- 3509 35 m

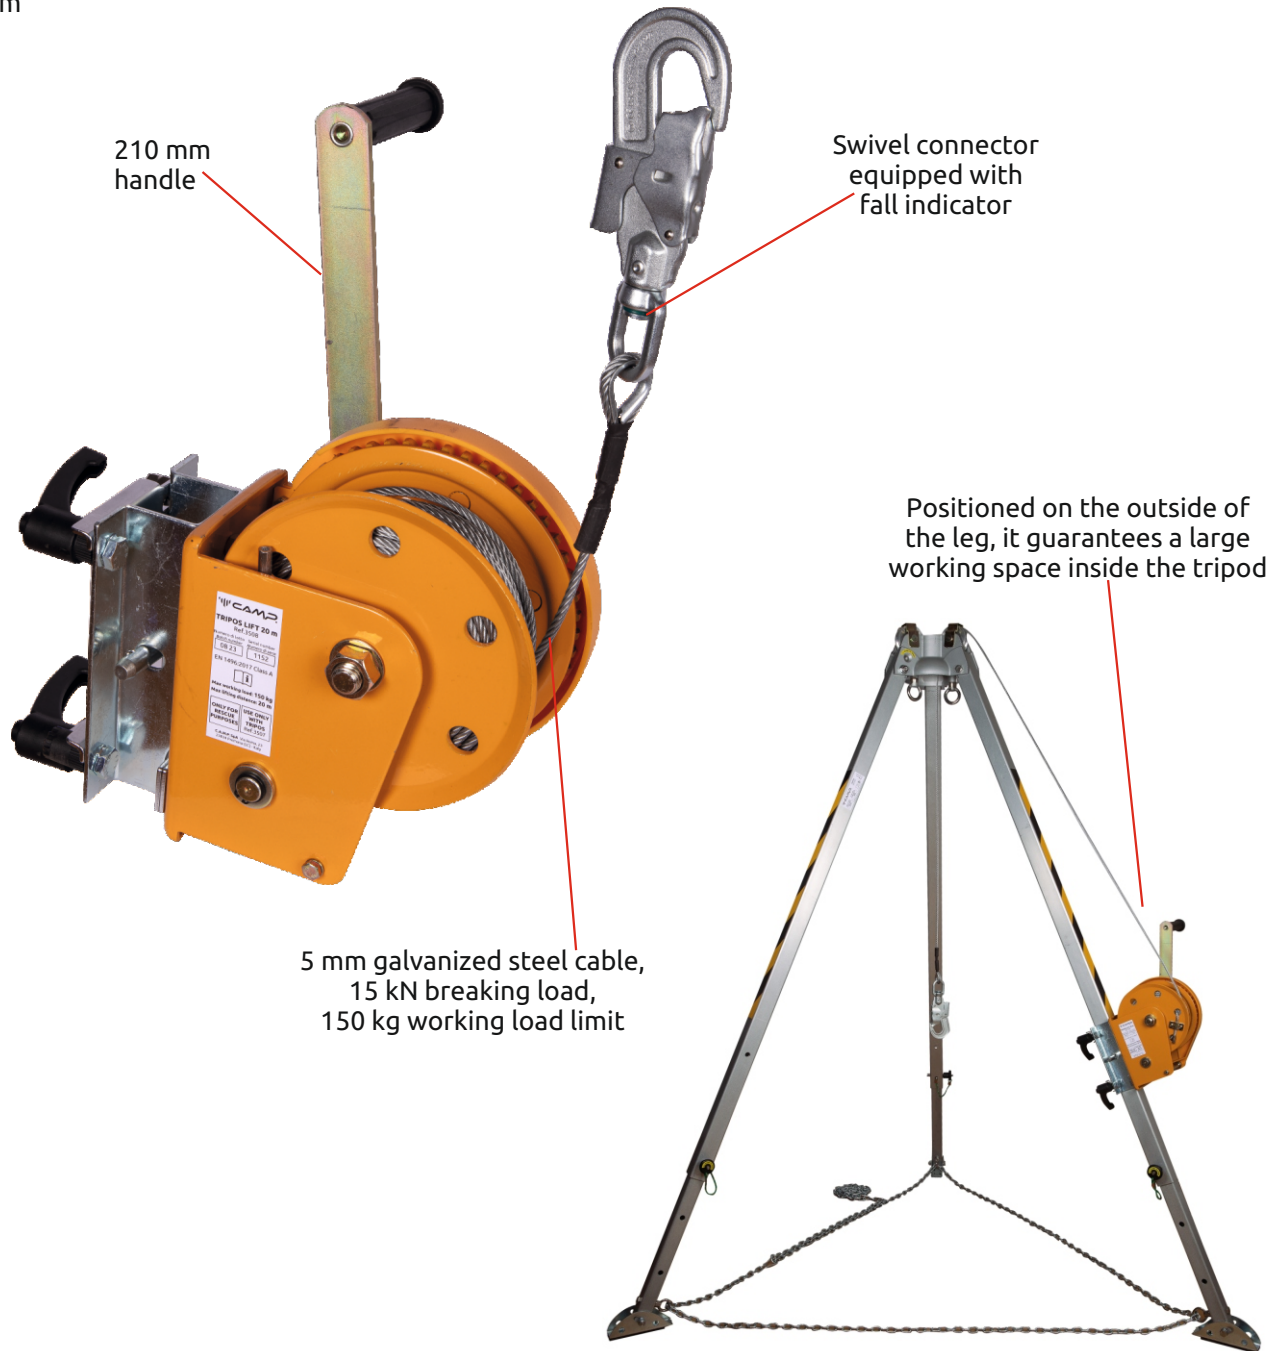

Ref.	Product name Nombre del producto	Weight Peso		Working load Max Carga de trabajo Max	STANDARD
		kg	oz	kg	EN 1496/A
3508	TRIPOS LIFT 20 m	12.5	441.3	150	•
3509	TRIPOS LIFT 35 m	13.5	476.5	150	•

TRIPOS and TRIPOS LIFT, one user, without risk of falling from a height
 TRIPOS e TRIPOS LIFT, un utilizzatore, senza rischio di caduta dall'alto
 TRIPOS et TRIPOS LIFT, un utilisateur, sans risque de chute de hauteur

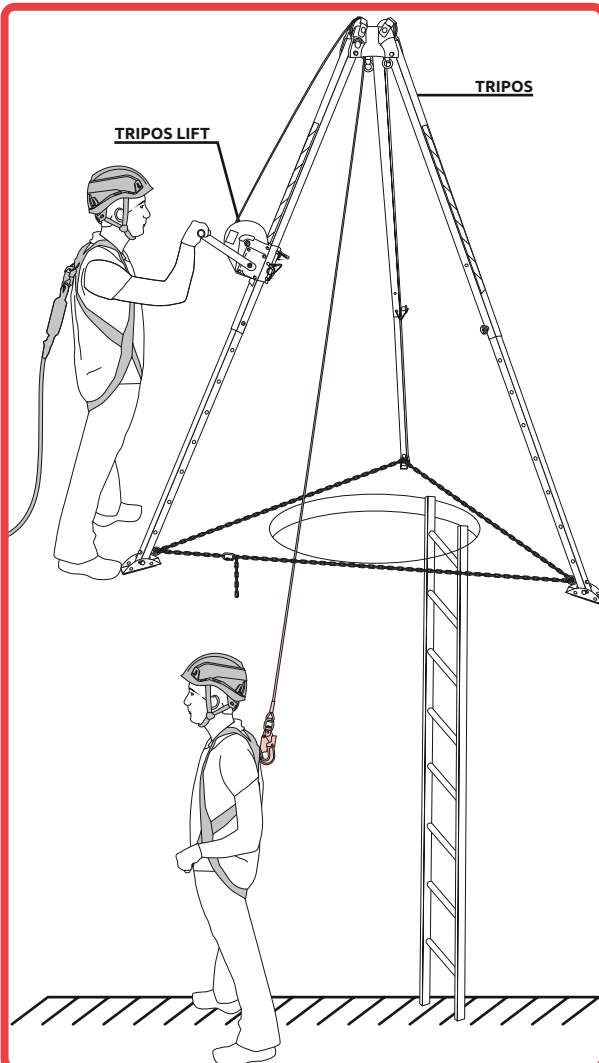

TRIPOS and two COBRA LIFT, two users, with risk of falling from a height
 TRIPOS e due COBRA LIFT, due utilizzatori, con rischio di caduta dall'alto
 TRIPOS et deux COBRA LIFT, deux utilisateurs, avec risque de chute de hauteur

