


DATASHEET

SKYFIX TYP 63

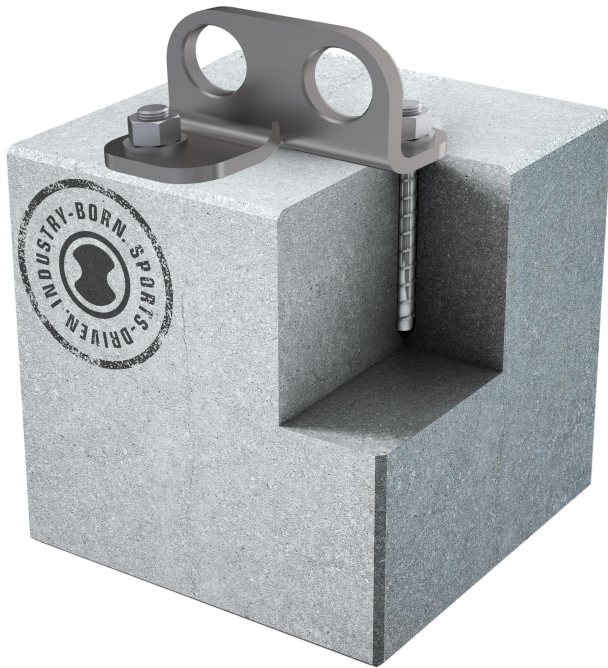

GENERAL

Art.Nr:	AP-TYP-63
GTIN:	4030281277699
E-class number:	40-02-01-90
Customs tariff number:	73269098

Standards:	EAD 331072-00-0601
Net weight:	1.17 kg
Gross weight:	1.17 kg

DATASHEET

SKYFIX TYP 63

The corrosion-resistant single anchor point SKYFIX AP-TYP-63, made of stainless steel, has been specially developed for use on concrete substrates. It has a European Technical Assessment (ETA -16/0790) and is tested and certified according to EN 795: 2012, CEN/TS 16415: 2013. It can be quickly and reliably attached to any concrete substrate (grade min. C20/25, d_{min.}=120 mm) using the supplied fixed anchors. It can be loaded in all directions and, with its two generously dimensioned openings, can protect up to three people from falling with their PPE. It is attached using 2 fixed anchors. The minimum thickness of the base is 120 mm.

- Single anchor point, especially for concrete substrates
- Fastening with, fixed anchor, AK 1, approval for 3 persons

FEATURES

Anchor point type:	Stationary anchor point
Type mounting base:	Concrete
Mounting type:	Fix anchor
Thickness mounting base:	120 mm
Application areas:	Off Shore Industry, Telco energy, Wind energy, lithium_ion
Colour:	Silver
Maximum number of persons:	3
Maximum load:	500.00 kg
Rope access technique:	Yes

DIMENSIONS

Diameter pillar:	0 mm
Diameter bore:	10 mm
Construction height:	69 mm
Foot plate length:	120 mm
Foot plate width:	93 mm
Hole spacing a:	58 mm
Hole spacing b:	60 mm

MATERIAL

Material:	Stainless Steel
-----------	-----------------