

## Data sheet

**MILAN 2.0 HUB****GENERAL**

Art. no.:	A-028	E-class number:	40-02-01-06
EAN:	4030281155850	Customs tariff number:	84251900
Standard:	EN 1496-A:2007 EN 341-A:2011		

## Data sheet

### MILAN 2.0 HUB

The MILAN 2.0 HUB is additionally equipped with a lifting function. This enables an accident victim to be lifted across a short distance, in order to release the victim's lanyards, after which the victim can then be safely lowered by rope (where the new housing design improves handling for the accompanying rescue). The SUPER STATIC 9.0 static rope fulfils this requirement despite its diameter of only 9 mm. The packing size of the MILAN 2.0 HUB is small compared to ropes which are 10.5 mm in diameter. This is a major advantage, in particular, at great heights.

#### STANDARDS

Internat. standard: ANSI Z359.4:2007

---

#### FEATURES

Abseiling speed: 0,9 m/s

---

Abseiling height: 500 m

---

Max. number of persons: 2

---

Max. rated load: 260 kg

---

Temperature: from -35 °C to 60 °C


---

Suspension element: Super Static 9mm

---

Area of application:

Anti Corrosion Coating, Lift Construction, Police/Military/Special Forces, Power Supplies, Power Transmission, Rescue, Rope Courses, Telecommunication, Wind Power

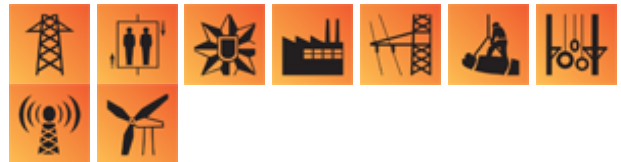

#### MEASUREMENTS / WEIGHT

Weight: 3.11 kg

---

#### CARABINER

Carabiner on rope: KOBRA TW

---

Carabiner on anchoring point side:

KOBRA TW

---



High Protection. Best Performance.

## MATERIAL

Material:

ALUMINIUM ELOXIERT, POLYAMID, STAHL  
GALVANISCH VERZINKT

---